

# FLEET100

AFFORDABLE FUEL MANAGEMENT

**computrol**  
FUEL SYSTEMS INC

Economical  
Expandable  
Durable




SECURE RELIABLE AFFORDABLE

[computrolfuel.com](http://computrolfuel.com)

# FLEET100

## AFFORDABLE FUEL MANAGEMENT

**computrol**  
FUEL SYSTEMS INC

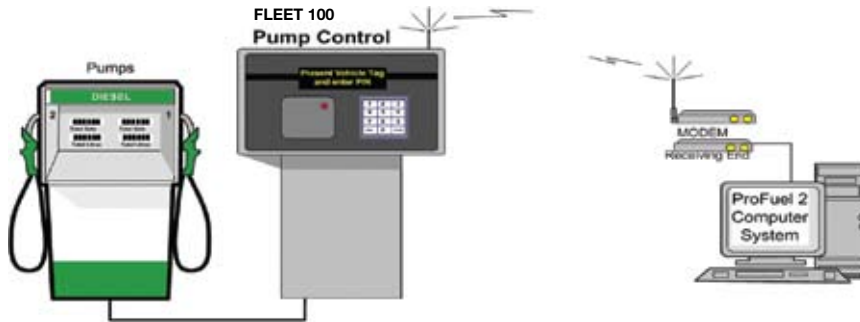

**ONE YEAR WARRANTY**  
Refer to Manual for Specific warranty Information

**ECONOMICAL** - Entry level unit for small fleet applications is both simple to install and operate

**EXPANDABLE** - Optional upgrade kits can increase capacity without cabinet or wiring changes

**DURABLE** - The rugged, CSA-inspected (NAFTA compliant) unit withstands harsh environments

### PUMP & HOSE CONFIGURATION

- Supports one or two hose new or existing pumps
- Compatible with all standard pump wiring
- Unit is preconfigured for 1 or 2 hoses to minimize set up

### MEMORY

- Manages and validates 25 to 100 cards or keypad codes for customers, drivers, and/or vehicles
- Records to 7 digit quantities with accuracy to 1/100 of a litre, gallon or kilogram
- Up to 480 transactions can be stored in the battery protected memory

### SECURITY

- System access is protected by password to prevent unauthorized use or accidental erasure of data
- 4-digit security PINS are assigned to any or all customer/employee cards
- Cards/codes can be instantly authorized or cancelled from a local or remote office

### OPTIONAL EXTRAS

- **Interfaces to Computrol's popular ProFuel software** to provide advanced management reports, including complete fuel usage reports by vehicle, customer, department, site and tank
- **In-yard wireless radio** linked kits available to eliminate costly conduit runs
- **Pedestal** - either powder coated steel or stainless steel
- **Removable winter covers** provide added protection thermal insulation

### COMMUNICATIONS

- Serial RS-232 for direct data to computer transfer
- Optional Ethernet converter available
- Wireless communication option available

### MANAGEMENT SOFTWARE

- **Basic Reporting:** Transactions can be grouped and printed by ascending card number
- Software permits setting of time, location and pump identity
- Standard modules permits scheduling for unattended polling of card readers

### SPECIFICATIONS

- Display LCD (liquid crystal display) 1 x 16 characters
- Dimensions: W 45.7 cm (18 in), H 26.6 cm (10.5 in), D 40.6 cm (16 in)
- Weight 15 kg (34 lb)
- Electrical 120 VAC 60 Hz dedicated circuit. Optional 230 VAC, 50 Hz
- Temperature: -40 °C (-40 °F) to 50 °C (122 °F)
- Humidity: 5% to 95% non-condensing
- Heater: 200 Watts - resistor type
- Pulser ratios 10:1 (standard setting) 100:1 or 1:1

**Tel:** 604.421.1001  
**TF:** 1.877.421.1001  
**Fax:** 604.421.1007

**Web:** [computrolfuel.com](http://computrolfuel.com)  
**Email:** [sales@computrolfuel.com](mailto:sales@computrolfuel.com)

MEMBER  
**PEI**  
PETROLEUM EQUIPMENT INSSTITUTE